


# Auralink Lumen-ASL

Innovative | Security and confidentiality| Intelligent control| Flexibility options

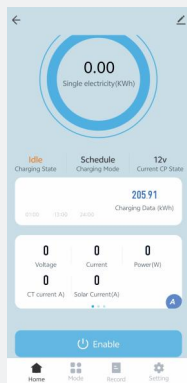

## HIGHLIGHTS

### ■ [Innovative]

- One charger with 2 charging points
- Commercial use with APP control
- Resistance to damage and corrosion

### ■ [Intelligent control]

- Support for multiple communications (WI-FI, 4G, Ethernet)
- Meet the OCPP1.6J protocol, Tuya APP
- Home load balancing control, (remote wireless transmission current signal)
- Balancing load control of new solar energy
- Power management & Group management

### ■ [Security and confidentiality]

- AC30mA + DC6mA leakage protection design
- Over temperature protection
- Over and under voltage protection
- Over current protection
- Input ground wire is normal monitoring protection
- Surge protection
- Meet the network security requirements

### ■ [Flexible options]

- Meet the wall installation and column landing installation
- The multi-wire installation solution meets the requirements of different scenarios
- APP/Plug & Charge multi-charge mode is optional
- The surface color and shell color can be customized

# Technical Specification

Model Number	Auralink Lumen-07ASL
Charging Power (AC)	7kW
AC power	1P+N+PE
Voltage (V)	AC 220 ~ 240V
Frequency (Hz)	50/60Hz
Operating Temperature	-25°C to + 50°C
Rated Current	Max 32A( 6-32A Adjustable)
Incoming Cable Terminals	3 × 10mm <sup>2</sup> terminals
Over Current Protection	Recommended 36A
Charging Socket	IEC 62196 (Type 2)
AC & DC Fault Protection	30mA Type A + 6mA DC sensitive protective device

## Feature





- IP54
- LED charging status indicator
- AC & DC Fault Protection
- Over Current Protection
- Ground detection
- Surge protection
- Over/Under voltage protection
- Over temperature Protection

## Optional

- APP (TUYA)
- RFID
- LCD
- OCPP1.6J
- PEN protection(UK)

## CONTACT US

# Auralink Energy

-  Melbourne, Victoria
-  +61 0403 239 826
-  +86 180 9426 9068
-  [info@auralink-energy.com](mailto:info@auralink-energy.com)