


Auralink Lumen-HPAS

Innovative | Security and confidentiality| Intelligent control| Flexibility options

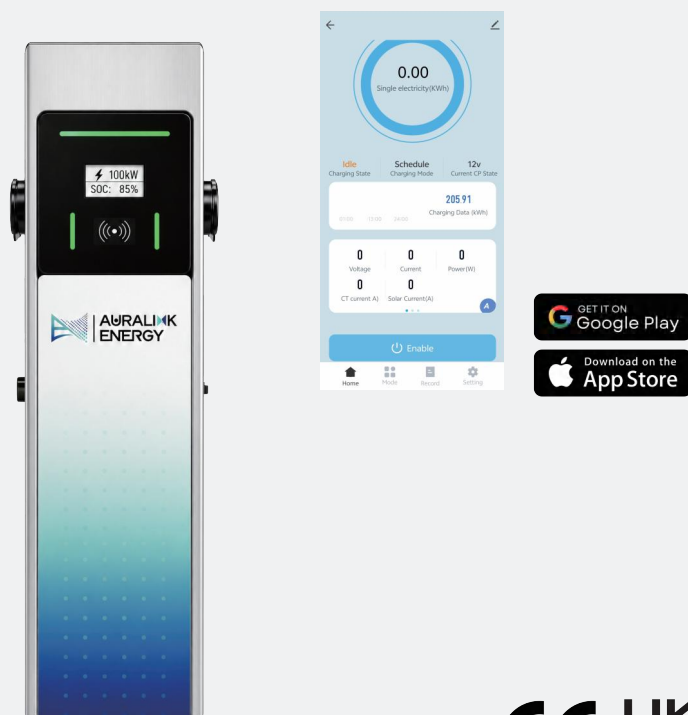

HIGHLIGHTS

■ [Innovative]

- One charger with 2 charging points
- Optional T2S socket design
- Commercial use with APP control
- Resistance to damage and corrosion

■ [Security and confidentiality]

- AC30mA + DC6mA leakage protection design
- Over temperature protection
- Over and under voltage protection
- Over current protection
- Input ground wire is normal monitoring protection
- Surge protection
- PEN Failsafe (optional in the UK)
- Meet the network security requirements

■ [Intelligent control]

- Support for multiple communications (Wi-Fi, 4G, Ethernet)
- Meet the OCPP1.6J protocol
- Meet APP scan code payment
- Power management & Group management

■ [Flexible options]

- APP/Plug & Charge multi-charge mode is optional
- Configure the meter with MID certification as required

Technical Specification

Model Number	Auralink Lumen—07HPAS	Auralink Lumen—11HPAS	Auralink Lumen—22HPAS
Charging Power (AC)	7kW	11kW	22kW
AC power	1P+N+PE	3P+N+PE	
Voltage (V)	AC 220 ~ 240V	AC 380 ~ 415V	
Frequency (Hz)	50/60Hz		
Operating Temperature	-25°C to +50°C		
Rated Current	2 × 32A (adjustable)	2 × 16A (adjustable)	2 × 32A (adjustable)
Rated Power	2 × 7.4kW	2 × 11kW	2 × 22kW
Charging Connector	IEC 62196 (Type 2)		

Feature





- IP55 & IK10
- LCD Display
- LED charging status indicator
- AC & DC Fault Protection
- Over Current Protection
- Ground detection
- Surge protection
- Over/Under voltage protection
- Over temperature Protection

Optional

- APP (TUYA)
- RFID
- Payter
- OCPP1.6J
- PEN protection(UK)

CONTACT US

Auralink Energy

-  Melbourne, Victoria
-  +61 0403 239 826
-  +86 180 9426 9068
-  info@auralink-energy.com